

ACTIVE LONG RANGE VGA EXTENSION KIT

ITEM NO.: TTA111VGA



The Active Long Rang Kit allows VGA video signals to be transmitted up to 300 meters via 4-pair CAT5 unshielded twisted pairs cable. Used in pairs, the VGA extender is used in home or commercial applications as a smart, fast and cost-effective, eliminates costly and bulky VGA cable, allowing VGA monitors to be connected extended distances from the PC via standard twisted pair cable. Ideal for classrooms video distribution, lecture halls, retail kiosks, video information displays, overhead projector systems, PC-training systems, and tradeshows PC demo systems.

Features:


- Active type, including transmitter and receiver.
- Built in contrast, brightness adjustment at Receiver.
- Supports up to 1600x1200 @85Hz.
- Built in ESD and power protection.
- LED indication for power and signal.
- Use 4 pairs UTP CAT5 cable instead of VGA cable for long rang transmission.
- Long range transmission up to 300 meters (Max.)

Option model:

VE02DALS VGA & Stereo/Digital Audio CAT5 Receiver– Built in Skew Corrector


- Identical to above TTA111VGAR CAT5 receiver.
- Built in RGB skew adjustment for the optimum video performance under long cable run.
- It could be daisy chained for another VE02DALS to extended working range over 300 meters and multiple displays.

Installation View:

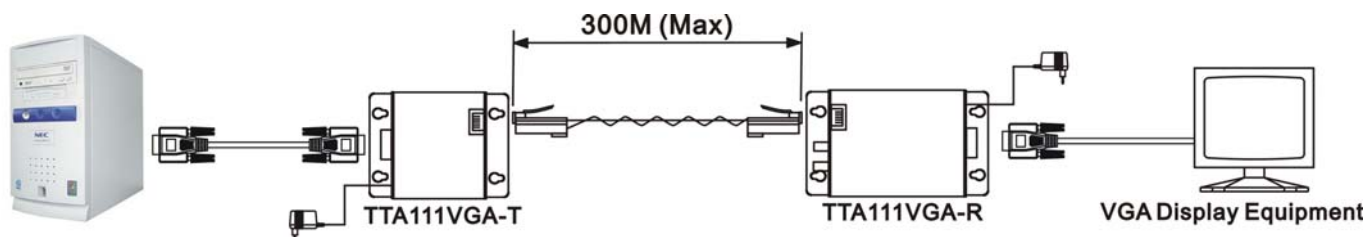


Panel View:

TTA111VGA-T

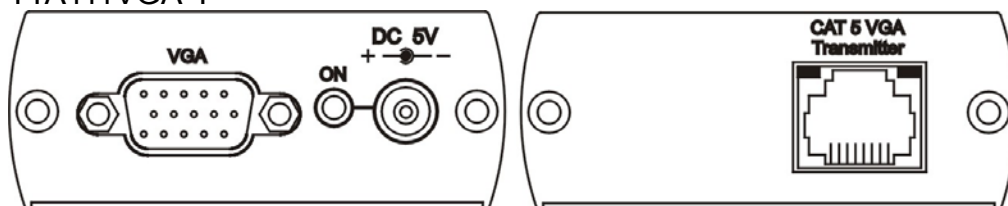

TTA111VGA-R

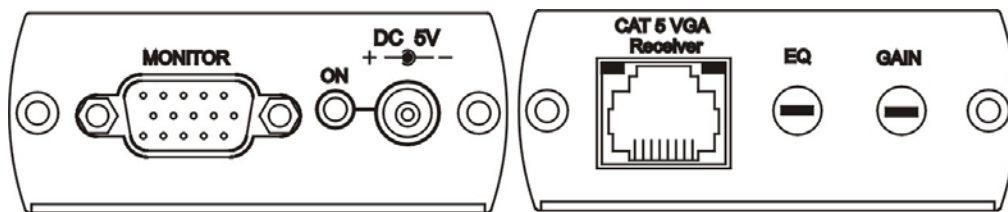

LED Indication

Blue : Power on/off

RJ45 (Link Cable Connector): Green - Signal on/off

Specification:


ITEM NO.	TTA111VGA
Support Resolution	Up to 1600 x 1200 @ 85 Hz
Transmission Distance	Up to 1000 ft. (300 m)
Video Amplifier Bandwidth	150MHz
Input Signals	RGB Analog (75Ω, 0.7Vp-p)
	Sync Signal H/V Separated (TTL)
Horizontal Frequency Range	30-95KHz
Vertical Frequency Range	50-180Hz
VGA Connector	15-pin Mini D-Sub (High Density)
Link Connector	RJ-45
Power Supply	2 x 5V DC 2Amp (External)
Power Consumption	TTA111VGA-T 150mA (Max), TTA111VGA-R 400mA (Max)
Temperature	Operation: 0 to 55°C, Storage: -20 TO 85°C, Humidity: up to 95%
Dimensions W x H x D mm	TTA111VGA-T 67x27x87, TTA111VGA-R 67x27x110




Installation Tips:

Skew Picture:

Due to the inside of CAT5 cable that the pairs of wires are twisted at different rates, and the different quality on cable itself and installation that will cause different signal arrival time at each pair. If there are big different at arrival time, that will cause RGB skew status.. This is seen on the monitor as separation, or lack of convergence in colors. Normally it happens on long CAT 5 cable runs.

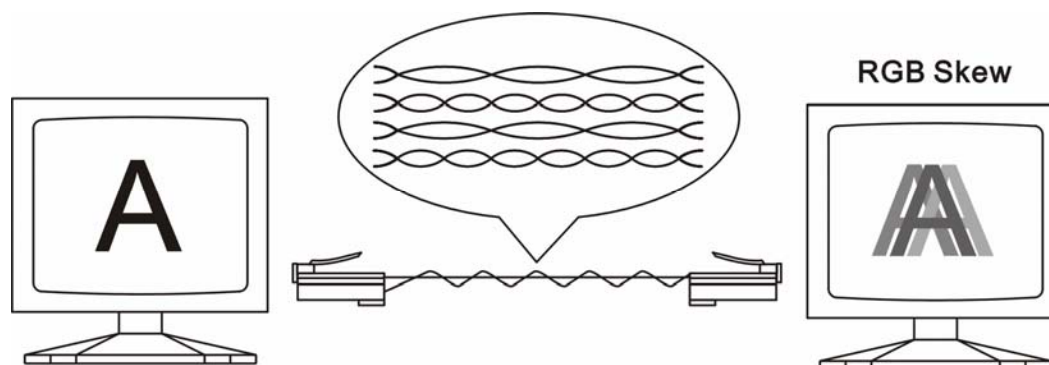

1. Recommend to use following cabling way to reduce skew status, to add special made "skew immunized adaptor", 2 pieces included at the package.

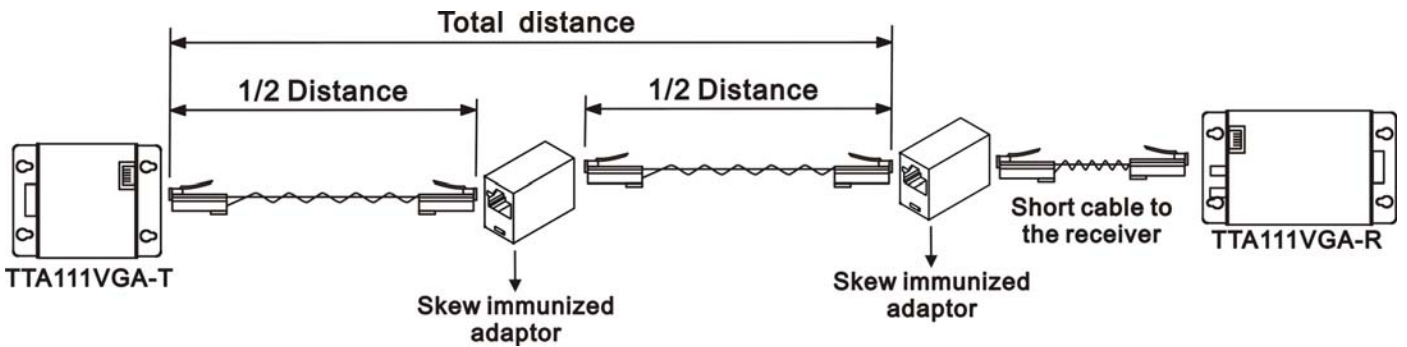

CAUTION: to avoid display equipment damaged, be sure to make correct cable connection and power for both VD102T, VD105T TTA111VGAR before connecting VD102T, VD105T, TTA111VGAR.

2. Recommend to change TTA111VGAR CAT5 receiver to VE02DALS, which built in RGB skew adjustment for the optimum video performance under long cable run. It also could be daisy chained for another VE02DALS to extended working range over 300 meters and multiple displays.

