

DIY KITS : NETWORK CABLE TRANSMISSION

ITEM NO.: TTP111VPK-RJ45 (TTP111VP + TTP111VPJ DIY KIT)

TTP111VP : BNC to RJ45 with DC Plug, connect with camera directly.



TTP111VPJ: BNC to RJ45 with DC Jack, connect with power adaptor and Monitor, DVR directly.



Features:

- Transmit video and power over one CAT 5 networking cable. Add you own power supply.
- Eliminate coaxial & power cable. Substantial saving on the cost of the cable itself.
- Fast, easy installation, saving time and money.
- Send color video signals up to 300 meters; B/W to 600 meters
- Refer the page 2. "Voltage Drop According to Cable Length" for power transmission range.

Installation View:

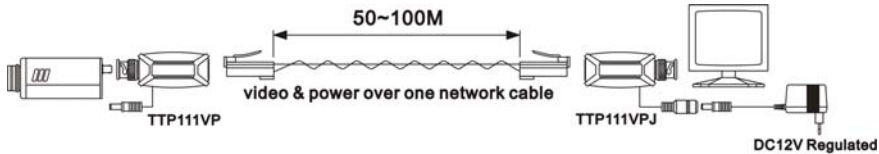

RJ45 pin connect
Pair 1 : 1. Orange-white & 2. Orange
Pair 2 : 3. Green -white - & 6. Green + → Power
Pair 3 : 5. Blue-white - & 4. Blue + → Power
Pair 4 : 7. Brown-white & 8. Brown → Video

Specification:

ITEM NO.	TTP111VPK-RJ45
VIDEO INPUT	1V p-p, 75 Ohms
TRANSMISSION DISTANCE	600M(B/W), 300M(COLOR)
REQUIRED CABLE	Twisted Pair CAT-5E (AWG24)
POWER	Pass Through
DIMENSIONS	W x H x D mm 69x25x22

Voltage Drop According to Cable Length (24AWG):

Power Range	Power Supply Voltage 12 Volts DC								
	50M			100M			300M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	11.4	11.7	11.8	10.8	11.3	11.6	9.6	10.6	11
100mA	11	11.5	11.5	9.7	10.8	11.2		9.2	10.1
150mA	10.5	11.2	11.3	9	10.4	10.9			9.3
200mA		11	11.2		9.9	10.6			
250mA		10.7	11		9.4	10.2			
300mA		10.5	10.8			9.9			
350mA		10.3	10.6			9.7			
400mA		10	10.4			9.4			
450mA		9.6	10.2						
500mA		9.2	9.8						

Power Range	Power Supply Voltage 15 Volts DC											
	50M			100M			300M			600M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	14.4	14.7	14.8	13.8	14.3	14.6	11.9	13.6	14	X	12	12.9
100mA	14	14.5	14.5	12.7	13.8	14.2	X	12.2	13.1	X	X	11.1
150mA	13.5	14.2	14.3	12	13.4	13.9	X	11.1	12.3	X	X	X
200mA	12.6	14	14.2	11.3	12.9	13.6	X	X	11.5	X	X	X
250mA	12.1	13.7	14	10.3	12.4	13.2	X	X	X	X	X	X
300mA	11.8	13.5	13.8	X	12	12.9	X	X	X	X	X	X
350mA	11.3	13.3	13.7	X	11.7	12.7	X	X	X	X	X	X
400mA	10.8	13	13.5	X	11.2	12.4	X	X	X	X	X	X
450mA	X	12.7	13.3	X	10.7	12.1	X	X	X	X	X	X
500mA	X	12.4	13.1	X	X	11.6	X	X	X	X	X	X

Power Range	Power Supply Voltage 24 Volts DC											
	50M			100M			300M			600M		
Camera Power Consumption	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR	1 PAIR	2 PAIR	3 PAIR
50mA	23.8	23.8	23.8	23	23.5	23.6	21	22.4	23	18.1	21.2	22.1
100mA	23.6	23.4	23.5	22.4	23.1	23.3	18.7	21.1	22.2	12.9	18.7	20.4
150mA	22.6	23.2	23.3	21.3	22.6	22.9	16.2	20	21.3	X	16.1	18.9
200mA	22.1	22.9	23.1	20.3	22	22.5	13.7	18.1	20.5	X	13.5	17.1
250mA	21.6	22.6	22.9	19.4	21.6	22.2	10.9	17.4	19.6	X	11.1	15.4
300mA	21.1	22.4	22.7	18.4	21.2	21.9	X	16.1	18.8	X	X	13.8
350mA	20.6	22.1	22.5	17.5	20.6	21.6	X	15	18.1	X	X	12.2
400mA	20.2	21.8	22.3	16.5	20.1	21.2	X	13.9	17.3	X	X	10.7
450mA	19.7	21.6	22.1	15.5	19.6	20.9	X	12.7	16.6	X	X	X
500mA	19.1	21.3	21.9	14.5	19.1	20.5	X	11.3	15.4	X	X	X